

TANE WIRELESS CONTACTS[®]

NOW AVAILABLE FOR ORDERING!


NOW WIRELESS

TW-DW319.5 SMART DOOR SENSOR

AVAILABLE NOW

SPECIFICATIONS

- Wireless Signal Range: 375 ft., open air, with Wireless Control Panel
- Code Outputs: Alarm; Alarm Restore; Supervisory; Low Battery; External Alarm; External Restore; Tamper; Tamper Restore
- Transceiver Frequency: 345.000 MHz (crystal controlled)
- Unique ID Codes: Over one (1) million different code combinations
- Supervisory Interval: 70 minutes
- External Input: Accepts N/C dry contact devices
- Magnet Dimensions (L x W x H): 1.25 x .38 x .31 in
- Sensor Dimensions: 2.44 x 1 x 0.45 in
- Magnet Type: Rare earth
- Housing Material: ABS Plastic
- Color: White
- Operating Temperature: 35°-115° F
- Relative Humidity: 5-90% Non-Condensing
- Battery (included): Two (2) CR 2032 or equivalent Lithium batteries

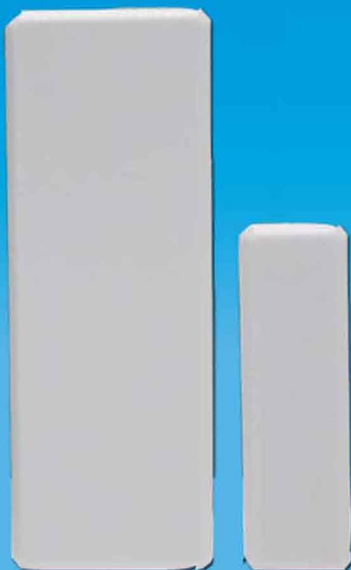

FEATURES

- Smart Battery Technology to Extend Life
- Superior Battery Life, Up to 350 Uses Every Day for 5 Years
- Tested Multiple Times Before Shipping to Ensure Reliability
- Auto-Reboot Technology Instantly Restores Crashed Sensors
- * 319.5Mhz compatible w/most Interlogix & Qolsys systems

TANE ALARM PRODUCTS[®]

906 Jericho Turnpike, New Hyde Park, NY 11040
Tel - 800-852-5050 | 516-328-3351 | Fax - 516-326-9125
WWW.TANEALARM.COM E-mail: info@tanealarm.com

